

Lift type

Closed lever

Bronze

耀希达凯yoshitake安全阀AL-150TML

Water

Air



S a f e t y R e l i e f V a l v e

# AL-150TML

## Features

1. Lever type safety relief valve. A discharge inspection can be manually performed when the difference between the set pressure and the inlet pressure is as shown in Table 1 below.
2. Excellent airtightness ensured by the valve seat incorporating soft seat. Most suitable for applications where valve seat leakage is not tolerated.
3. The trim parts (valve and valve seat) and adjusting spring are made of stainless steel. Used for the trim parts is SCS14A (equivalent to SUS316) with outstanding corrosion resistance.
4. Simple structure and easy to handle.
5. Closed structure prevents fluid leakage.

## Specifications

Structure		Closed type with a lever
Application		Air, Cold and hot water, Oil, Other non-dangerous fluids *
Working pressure		0.05-1.0 MPa
Maximum temperature		120°C
Material	Spring case	Cast bronze
	Valve, valve seat	Stainless steel (SCS14A)
	Adjusting spring	Stainless steel
	O-ring	FKM
Connection		JIS Rc screwed

\* Please contact us when using for oil.




## Dimensions and Weights

Nominal size	Dimension (mm)					Flow area $\pi D \ell$ (mm <sup>2</sup> )	Weight (kg)
	d	L	H <sub>1</sub>	H	Seat diameter		
15A	Rc 1/2	34	40	157	16	20.1	0.8
20A	Rc 3/4	38	43	158	21	34.6	0.9
25A	Rc 1	43	51.5	174	26	53.0	1.3
32A	Rc 1-1/4	50	61.5	212	33	93.3	1.9
40A	Rc 1-1/2	60	60	246	41	135.2	3.0
50A	Rc 2	75	76	286	51	208.2	4.9

[Table 1] Required differential pressure at a discharge inspection

Nominal size	Difference between set pressure and inlet pressure
15A-25A	1.0 MPa or less
32A, 40A	0.6 MPa or less
50A	0.4 MPa or less

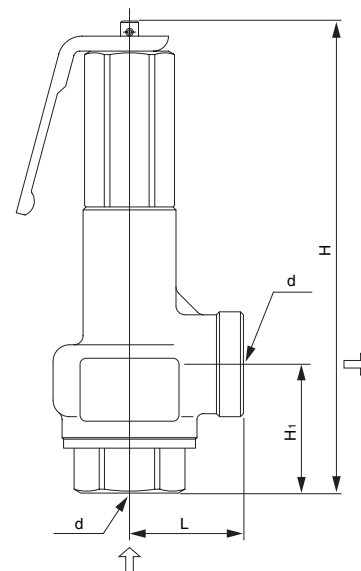

## Soft seat is used for the trim parts!

Soft seat (O-ring) is used for the trim parts, ensuring the reliable airtightness of the valve seat.

<http://www.yoshitake-bj.com>



010-59799400  
Soft seat (O-ring)

Safety Relief Valve