

GP-1000



GP-1000-1002



GP-1200



GP-1010



GP-1001

Features

1. Significantly improved workability and durability compared with conventional pressure reducing valves.
2. Spherical main valve offers great sealability and great reduction of valve seat leakage (compliant with ANSI Class IV).
3. Compliant with SHASE-S106 Pressure Reducing Valves (by the Society of Heating, Air-Conditioning and Sanitary Engineers of Japan).
4. Simple and robust internal structure.

Description of GP-1000 Series model code

GP-1000

Material, S: trim parts made of stainless steel,
SS: wetted parts made of stainless steel, AS: all stainless steel

0: standard, 1: equipped with a handle,
2: for low pressure

0: flanged, 1: screwed

0: standard, 2: air loading type

Specifications


Model		GP-1000-1001	GP-1002	GP-1010	GP-1200	GP-1210
Application		Steam				
Inlet pressure		0.1-1.0 MPa	0.1-0.5 MPa	0.1-1.0 MPa		
Reduced pressure		0.05-0.9 MPa	0.03-0.15 MPa	0.05-0.9 MPa		
		90% or less of inlet pressure (gauge pressure)				
Minimum differential pressure		0.05 MPa				
Maximum pressure reduction ratio		20:1				
Maximum temperature		220°C				
Valve seat leakage		0.01% or less of rated flow				
Material	Body	Ductile cast iron				
	Valve, valve seat	Stainless steel				
	Piston, cylinder	Brass or bronze				
Connection		JIS 10K FF flanged	JIS Rc screwed	JIS 10K FF flanged	JIS Rc screwed	JIS Rc screwed

• Available with trim parts (piston and cylinder) made of stainless steel (GP-□□□□S).

Dimensions (mm) and Weights (kg)


●GP-1000•1002

Nominal size	L	H ₁	H	Weight
15A	150	64	285	8.0
20A	155	64	285	8.5
25A	160	67	300	10.0
32A	190	82	323	14.0
40A	190	82	323	14.5
50A	220	93	347	20.0
65A	245	100	357	30.0
80A	290	122	404	35.0
100A	330	144	450	52.5

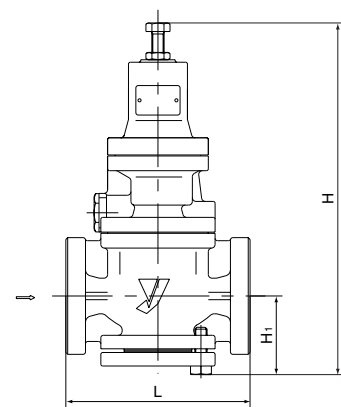


●GP-1010

Nominal size	d	L	H ₁	H	Weight
15A	Rc 1/2	150	64	285	7.0
20A	Rc 3/4	155	64	285	7.0
25A	Rc 1	160	67	300	8.5
32A	Rc 1-1/4	190	82	323	12.0
40A	Rc 1-1/2	190	82	323	12.5
50A	Rc 2	220	93	347	18.0

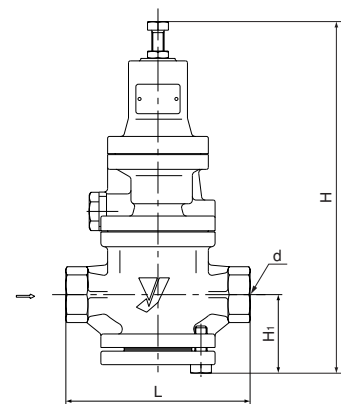

●GP-1200

Nominal size	L	H ₁	H	Weight
15A	150	64	220	8.0
20A	155	64	220	8.5
25A	160	67	235	10.0
32A	190	82	258	14.0
40A	190	82	258	14.5
50A	220	93	282	20.0
65A	245	100	292	30.0
80A	290	122	339	35.0
100A	330	144	385	52.5

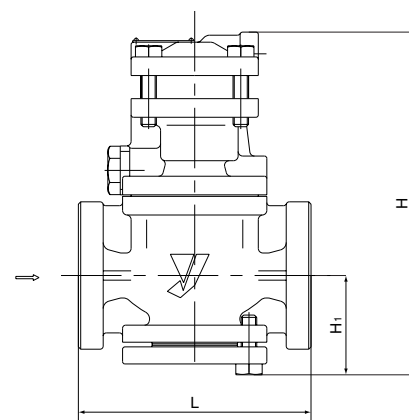

●GP-1210

Nominal size	d	L	H ₁	H	Weight
15A	Rc 1/2	150	64	220	7.0
20A	Rc 3/4	155	64	220	7.0
25A	Rc 1	160	67	235	8.5
32A	Rc 1-1/4	190	82	258	12.0
40A	Rc 1-1/2	190	82	258	12.5
50A	Rc 2	220	93	282	18.0

